





**LF 1400**

**LAMPS INCLUDED  
TRANSFORMER SOLD SEPARATELY**

- ADA compliant design
- Rated for extreme loads and heavy foot traffic
- Spillage resistant

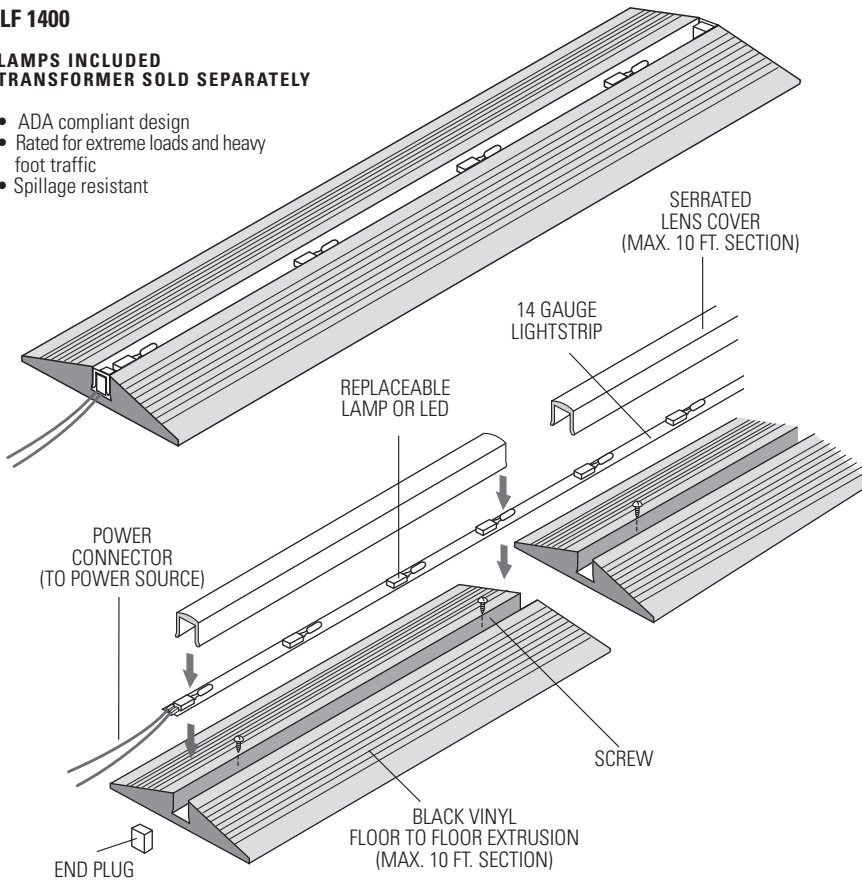

**END VIEW**

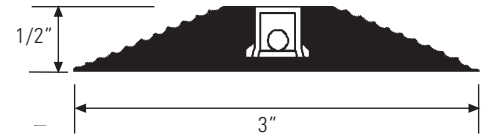

**QUICK REFERENCE INSTALLATION INSTRUCTIONS**

1. Screw mount extrusion sections.
2. Unroll lightstrip and lay into channel.
3. Strip end of lightstrip to attach power connector.
4. Insert end plugs at ends.
5. Snap in lens cover.
6. Connect to power source.

Do not exceed maximum run length per circuit. Extrusion, lens cover and lightstrip are available in pre-cut sections or can be field cut.

**MAX. RUN PER CIRCUIT (5 AMPS)**

LAMP TYPE	LAMP SPACING	
	6"	12"
LF 1	79 FT.	158 FT.
LED	112 FT.	200 FT.

**CELESTIAL LED S & LAMPS ARE:**

- Safe ( low voltage )
- Energy efficient ( low wattage )
- Rated for long life
- Run at optimum brightness for darkened areas
- Resistant to vibration from foot traffic
- Individually replaceable
- Dimmable from primary side of transformer

•DRAWING NOT TO SCALE•

S P E C I F I C A T I O N S

PRODUCT CODE	LENS COLOR		LED / LAMP		LED / LAMP SPACING				
			TYPE	DESCRIPTION					
LF 1400	C	CLEAR	A	DC9.5V 0.2 W AMBER LED ( 100,000 HRS. RATED LIFE )	6 12	6" ON CENTER 12" ON CENTER  OR SPECIFY OTHER SPACING			
	A	AMBER	B	DC9.5V 0.2 W BLUE LED ( 25,000 HRS. RATED LIFE )					
	B	BLUE	G	DC9.5V 0.2 W GREEN LED ( 25,000 HRS. RATED LIFE )					
	G	GREEN	R	DC9.5V 0.2 W RED LED ( 100,000 HRS. RATED LIFE )					
	R	RED	W	DC9.5V 0.2 W WHITE LED ( 25,000 HRS. RATED LIFE )					
	S	SMOKE	LF1	12V 0.34W INCANDESCENT LAMP ( 80,000 HRS. RATED LIFE )					
							USE CLEAR LENS WITH LEDS		
	<b>EXAMPLE</b>								
LF 1400	C		LF1		12				

FILL OUT BELOW FOR SUBMITTAL

LF 1400				
---------	--	--	--	--

PROJECT NAME	CONTRACTOR
FIXTURE SCHED. TYPE	DISTRIBUTOR
SPECIFIER	REPRESENTATIVE



visit us at :  
www.celestiallighting.com  
e-mail :  
info@celestiallighting.com

14009 Dinard Ave.  
Santa Fe Springs,  
CA 90670

PH (562)•802•8811  
(800)•233•3563  
FX (562)•802•2882