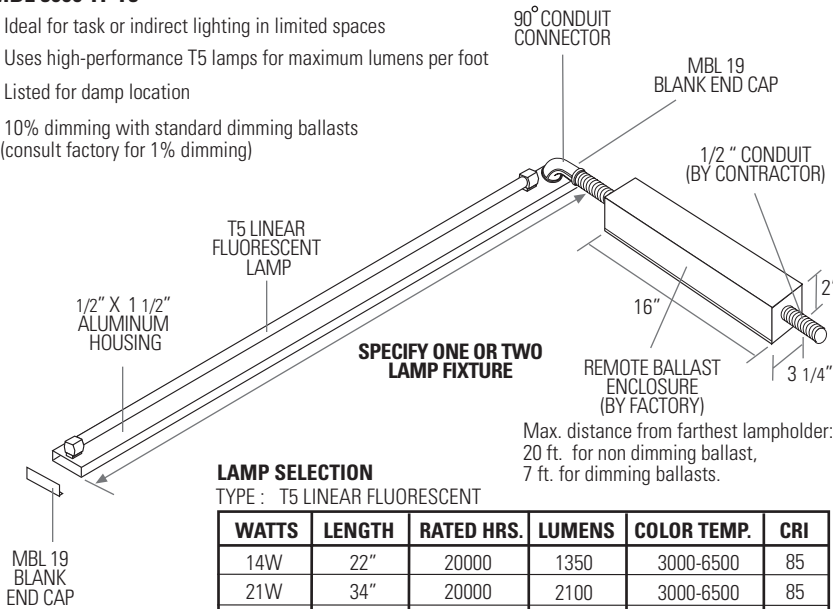



MBL 5000 TF T5

- Ideal for task or indirect lighting in limited spaces
- Uses high-performance T5 lamps for maximum lumens per foot
- Listed for damp location
- 10% dimming with standard dimming ballasts (consult factory for 1% dimming)



SPECIFY ONE OR TWO LAMP FIXTURE

Max. distance from farthest lampholder:
20 ft. for non dimming ballast,
7 ft. for dimming ballasts.

LAMP SELECTION


TYPE: T5 LINEAR FLUORESCENT

| WATTS | LENGTH | RATED HRS. | LUMENS | COLOR TEMP. | CRI |
|-------|--------|------------|--------|-------------|-----|
| 14W | 22" | 20000 | 1350 | 3000-6500 | 85 |
| 21W | 34" | 20000 | 2100 | 3000-6500 | 85 |
| 28W | 46" | 20000 | 2900 | 3000-6500 | 85 |
| 35W | 58" | 20000 | 3650 | 3000-6500 | 85 |

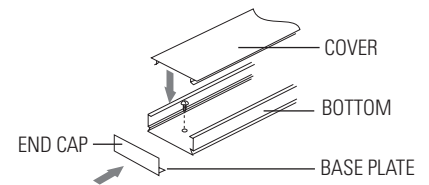
TYPE: T5 HIGH OUTPUT LINEAR FLUORESCENT

| WATTS | LENGTH | RATED HRS. | LUMENS | COLOR TEMP. | CRI |
|-------|--------|------------|--------|-------------|-----|
| 24W | 22" | 20000 | 2000 | 3000-6500 | 85 |
| 39W | 34" | 20000 | 3500 | 3000-6500 | 85 |
| 54W | 46" | 20000 | 5000 | 3000-6500 | 85 |

Refer to lamp manufacturers' catalog for full selection and details.
LAMPS NOT INCLUDED

END VIEW

QUICK REFERENCE INSTALLATION INSTRUCTIONS

1. Remove cover piece, using flathead screwdriver to pry open.
2. Screw mount bottom piece directly onto secure surface.
3. Snap cover piece into bottom piece.
4. Attach end caps at beginning and end of run, sliding base plate into bottom piece and securing with screw.
5. Connect lead wires from ballast to power source and ground. Do not power until installation complete.
6. Insert lamps.



S P E C I F I C A T I O N S

| PRODUCT CODE | LAMP WATTAGE | LAMPS PER FIXTURE & LENGTHS | | BALLAST LOCATION | BALLAST TYPE | | DIMMING | VOLTS | FINISH | |
|----------------|--------------|-----------------------------|--------------|------------------|--------------|------------|-------------------------------------|----------------|--------|------------------|
| | | 1 Lamp (1L) | 2 Lamps (2L) | | ELE | Electronic | | | NAL | SAT |
| MBL 5000 TF-T5 | 14W | 24" | 47" | R | ELE | Electronic | ND DM Non-dimming Dimming* | 120 V 277 V | NAL | Natural aluminum |
| | 21W | 36" | 71" | | | | | | | |
| | 28W | 48" | 95" | | | | | | | |
| | 35W | 60" | N/A | | | | | | | |
| | 24W HO | 24" | 47" | | | | | | | |
| | 39W HO | 36" | 71" | | | | | | | |
| | 54W HO | 48" | 95" | | | | | | | |

EXAMPLE

| | | | | | | | | | | | | | | |
|----------------|---|------|---|----|---|---|---|-----|---|----|---|-------|---|-----|
| MBL 5000 TF-T5 | - | 28 W | - | 1L | - | R | - | ELE | - | ND | - | 120 V | - | NAL |
|----------------|---|------|---|----|---|---|---|-----|---|----|---|-------|---|-----|

FILL OUT BELOW FOR SUBMITTAL

| | | | | | | | | | | | | | | |
|----------------|---|--|---|--|---|---|---|-----|---|--|---|--|---|--|
| MBL 5000 TF-T5 | - | | - | | - | R | - | ELE | - | | - | | - | |
|----------------|---|--|---|--|---|---|---|-----|---|--|---|--|---|--|

| | |
|----------------------------|-----------------------|
| PROJECT NAME | SPECIFIER |
| FIXTURE SCHED. TYPE | CONTRACTOR |
| QUANTITY | DISTRIBUTOR |
| LENGTHS | REPRESENTATIVE |



visit us at :
www.celestiallighting.com
e-mail :
info@celestiallighting.com

14009 Dinard Ave.
Santa Fe Springs,
CA 90670

PH (562)•802•8811
(800)•233•3563
FX (562)•802•2882