




**BOL 3000 IBX**

- Ideal for task or indirect lighting in curved spaces
- Listed for damp location
- Dimmable

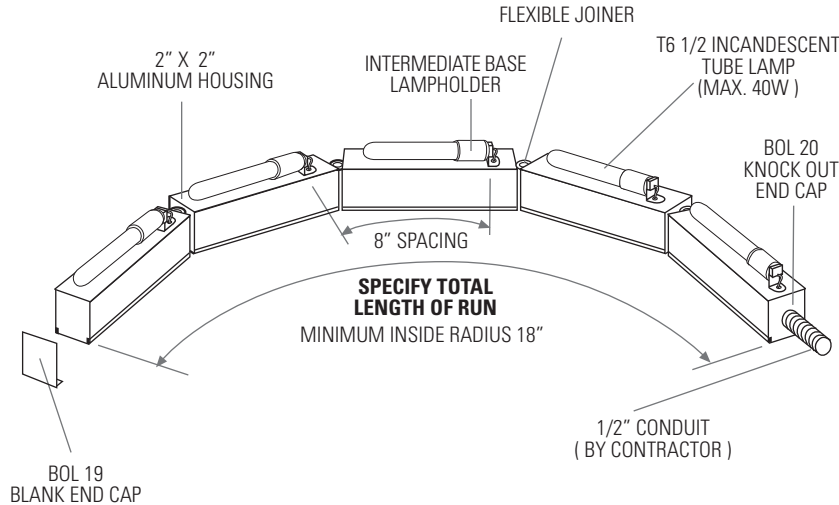


**RECOMMENDED LAMPS**  
TYPE : T6 1/2 INCANDESCENT TUBE LAMP  
BASE : INTERMEDIATE BASE

WATTS	RATED HRS.	LUMENS
20W	7000	90
25W	1000	244
40W	750	420


**LAMPS NOT INCLUDED**

**END VIEW**



**QUICK REFERENCE INSTALLATION INSTRUCTIONS**

1. Remove cover piece from module, by removing screws and using flathead screwdriver to pry open.
2. Screw mount bottom piece directly onto secure surface.
3. Snap cover piece into bottom piece and replace screws.
4. To continue run, attach and mount next module and make electrical connections.
5. Attach end caps at beginning and end of run, sliding base plate into bottom piece and securing with screw.
6. Connect lead wires at beginning of run to power source and ground. Do not power until installation complete.
7. Insert lamps.

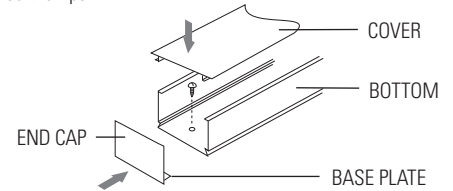

**S P E C I F I C A T I O N S**

PRODUCT CODE	VOLTS	LAMP WATTAGE	LAMP SPACING		FINISH					
			8" o.c.	8" on center	NAL	SAT	WHT			
BOL 3000 IBX	120 V	Select lamp wattage	8" o.c.	8" on center	NAL	Natural aluminum	SAT	Anodized satin	WHT	High reflectance white powder coat
						Or specify other				

**EXAMPLE**

BOL 3000 IBX	120V	25W	8" o.c.		NAL
--------------	------	-----	---------	--	-----

**FILL OUT BELOW FOR SUBMITTAL**

BOL 3000 IBX	120V		8" o.c.		
--------------	------	--	---------	--	--

<b>PROJECT NAME</b>	<b>SPECIFIER</b>
<b>FIXTURE SCHED. TYPE</b>	<b>CONTRACTOR</b>
<b>QUANTITY</b>	<b>DISTRIBUTOR</b>
<b>LENGTHS</b>	<b>REPRESENTATIVE</b>



visit us at :  
www.celestiallighting.com  
e-mail :  
info@celestiallighting.com

14009 Dinard Ave.  
Santa Fe Springs,  
CA 90670

PH (562)•802•8811  
(800)•233•3563  
FX (562)•802•2882