




**MBL 5000 TF T8**

- Ideal for task or indirect lighting in limited spaces
- Listed for damp location
- 10% dimming with standard dimming ballasts (consult factory for 1% dimming)

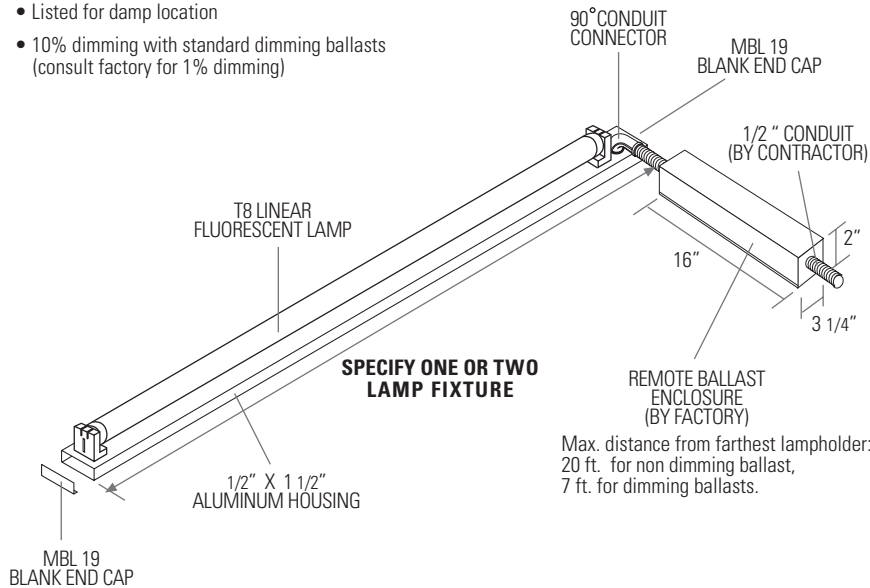

**SPECIFY ONE OR TWO LAMP FIXTURE**


REMOTE BALLAST ENCLOSURE (BY FACTORY)  
Max. distance from farthest lampholder:  
20 ft. for non dimming ballast,  
7 ft. for dimming ballasts.

**LAMP SELECTION**

TYPE: T8 LINEAR FLUORESCENT


WATTS	LENGTH	RATED HRS.	LUMENS	COLOR TEMP.	CRI
17W	24"	20000- 24000	910 - 1400	3000-6500	75 - 98
25W	36"	20000- 24000	1550 - 2225	3000-6500	75 - 98
32W	48"	20000- 24000	2000 - 3100	3000-6500	75 - 98

Refer to lamp manufacturers' catalog for full selection and details.  
**LAMPS NOT INCLUDED**

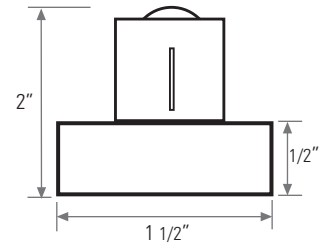

**QUICK REFERENCE INSTALLATION INSTRUCTIONS**

1. Remove cover piece, using flathead screwdriver to pry open.
2. Screw mount bottom piece directly onto secure surface.
3. Snap cover piece into bottom piece.
4. Attach end caps at beginning and end of run, sliding base plate into bottom piece and securing with screw.
5. Connect lead wires from ballast to power source and ground. Do not power until installation complete.
6. Insert lamps.

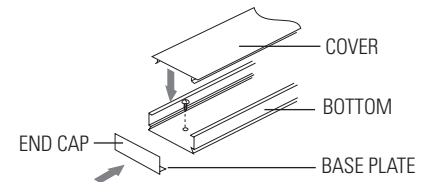

**S P E C I F I C A T I O N S**

PRODUCT CODE	LAMP WATTAGE	LAMPS PER FIXTURE & LENGTHS		BALLAST LOCATION	BALLAST TYPE		DIMMING		VOLTS	FINISH		
		1 Lamp (1L)	2 Lamps (2L)		ELE	Electronic	ND	Non-dimming		NAL	Natural aluminum	
MBL 5000 TF-T8	17 W	26"	50"	R	Remote	ELE	Electronic	ND	Non-dimming	120 V	SAT	Anodized satin
	25 W	38"	74"					DM	Dimming		WHT	High reflectance white powder coat
	32 W	50"	98"					Or specify other				

**EXAMPLE**

MBL 5000 TF-T8	32 W	1L	R	ELE	ND	120 V	NAL
----------------	------	----	---	-----	----	-------	-----

**FILL OUT BELOW FOR SUBMITTAL**

MBL 5000 TF-T8			R	ELE			
----------------	--	--	---	-----	--	--	--

PROJECT NAME	SPECIFIER
FIXTURE SCHED. TYPE	CONTRACTOR
QUANTITY	DISTRIBUTOR
LENGTHS	REPRESENTATIVE



visit us at :  
www.celestiallighting.com  
e-mail :  
info@celestiallighting.com

14009 Dinard Ave.  
Santa Fe Springs,  
CA 90670

PH (562)•802•8811  
(800)•233•3563  
FX (562)•802•2882