




TRANSFORMERS (CLTF)
REQUIRED FOR ALL LITEFORM FIXTURES


PRODUCT CODE	CAPACITY (W = VA)	DIMENSIONS (H X W X D)	WEIGHT
CLTF 50	50 VA	6.4" X 3.2" X 3.1"	4 LBS.
CLTF 100	100 VA	7.2" X 3.9" X 3.7"	5 LBS.
CLTF 150	150 VA	7.2" X 3.9" X 3.7"	7 LBS.
CLTF 250	250 VA	8.7" X 4.1" X 3.9"	10 LBS.
CLTF 500	500 VA	9.1" X 4.4" X 4.2"	15 LBS.
CLTF 750	750 VA	9.7" X 4.8" X 4.6"	19 LBS.

Primary Voltage 120V or 240 V
Secondary Voltage 12V or 24V
NEMA type 3 enclosure
ANSI/NEMA sound rating under 40 db
UL and CSA Listed

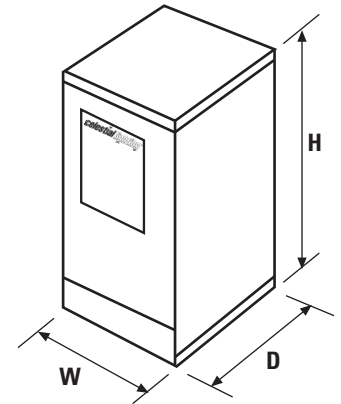


LED TERMINAL BREAKER BOX (LED-TBB)
REQUIRED FOR ALL LITEFORM FIXTURES WITH LEDs

Connects to secondary of transformer.
Rectifies AC 12V to DC 9.5V to maximize LED life.
Up to 4 resettable circuit breakers rated for 15 amps each.
Maximum dimensions: 14" (L) X 3.2"(W) X 2.8"(H)

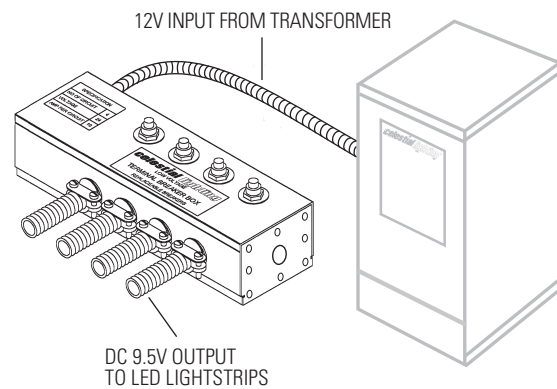


•DRAWING NOT TO SCALE•

POWER CONNECTOR (PC)
ONE PER CIRCUIT REQUIRED TO FEED POWER TO LIGHTSTRIP.

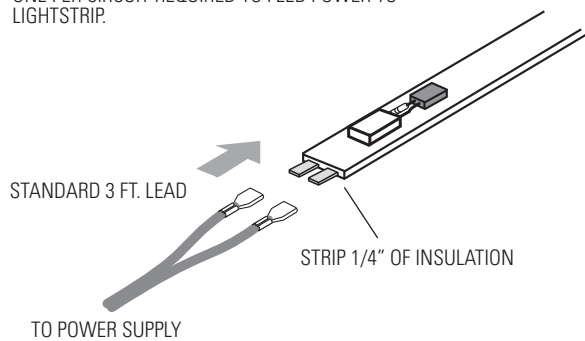

CORNER CONNECTOR (CC)
TO CONTINUE POWER AROUND CORNERS
STANDARD 3" LONG.

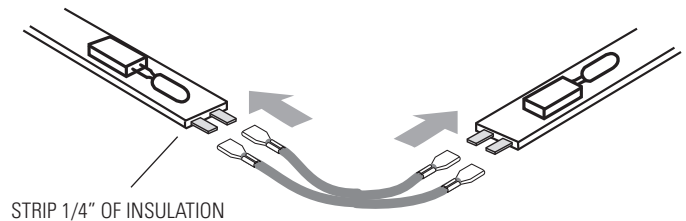

FILL OUT QUANTITIES

CLTF50	CLTF100	CLTF150	CLTF250	
CLTF500	CLTF750	LED-TBB	PC	CC

PROJECT NAME	CONTRACTOR
FIXTURE SCHED. TYPE	DISTRIBUTOR
SPECIFIER	REPRESENTATIVE



visit us at :
www.celestiallighting.com
e-mail :
info@celestiallighting.com

14009 Dinard Ave.
Santa Fe Springs,
CA 90670

PH (562)•802•8811
(800)•233•3563
FX (562)•802•2882