




LF 5000 DELINEATED STAIRNOSE (UNLIGHTED)

Light grey edge on black stairnose provides added step definition when using LF 4000 Wall Light to illuminate steps. (Refer to LF 4000 Specifier Guide)

Soft vinyl stairnose withstands extreme loads and heavy foot traffic. Conforms to gradual curves and irregularities in flooring. ADA compliant design (No trip hazard)

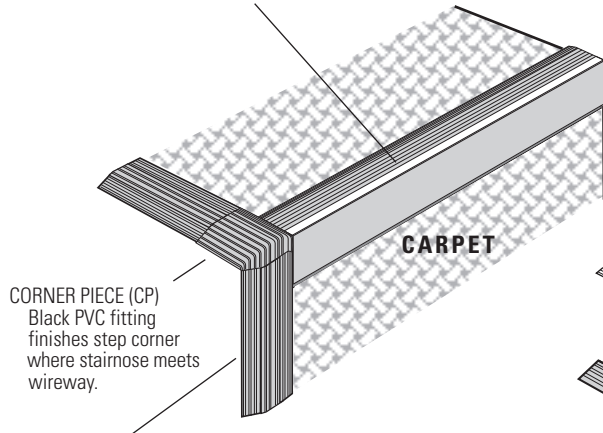


CORNER PIECE (CP)
Black PVC fitting finishes step corner where stairnose meets wireway.

WIREWAY (WW)
Black PVC fitting provides transition from carpet to floor or edge. Used as raceway for wire harness for lighted stairnose.

CELESTIAL LEDs & LAMPS ARE:

Safe (low voltage)
Energy efficient (low wattage)
Rated for long life.
Run at optimum brightness for darkened areas.
Resistant to vibration from foot traffic.
Individually replaceable.
Dimmable from primary side of transformer.

LF 5000 DELINEATED STAIRNOSE (LIGHTED)
For stairways without adjacent walls.

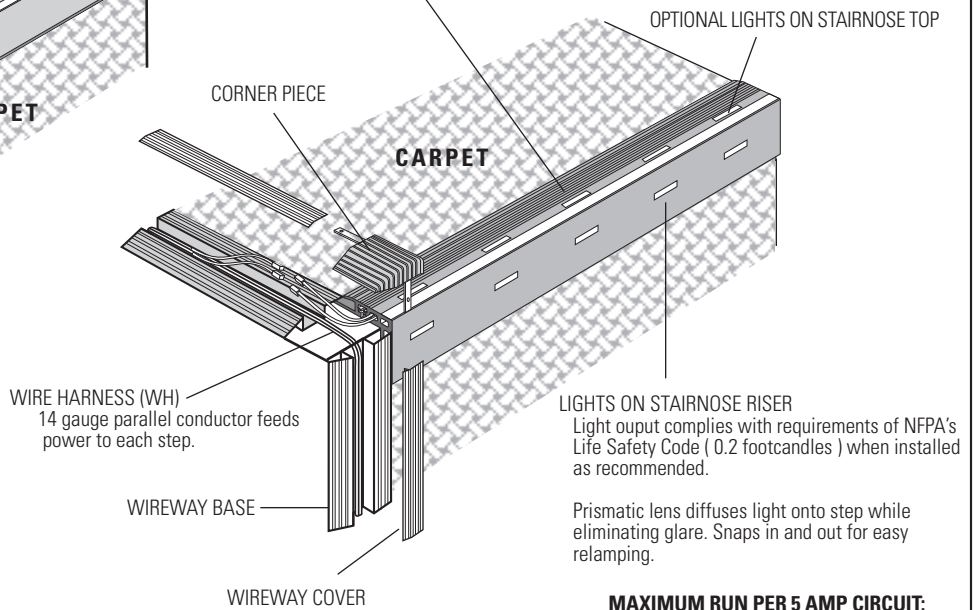


LIGHTS ON STAIRNOSE RISER
Light output complies with requirements of NFPA's Life Safety Code (0.2 footcandles) when installed as recommended.

Prismatic lens diffuses light onto step while eliminating glare. Snaps in and out for easy relamping.

MAXIMUM RUN PER 5 AMP CIRCUIT:
200 LEDs or 150 LF1 lamps

See maximum run chart for details.

•DRAWING NOT TO SCALE•

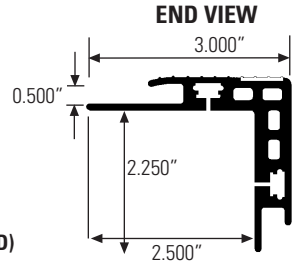

S P E C I F I C A T I O N S

PRODUCT CODE	STAIRNOSE LIGHT		LED / LAMP		LED / LAMP SPACING	
			TYPE	DESCRIPTION		
LF 5000	NL	NO LIGHTS				
	RO	RISER ONLY	A	DC 9.5V 0.2W HIGH OUTPUT AMBER LED (100,000 HRS. RATED LIFE)	4	4" ON CENTER
			B	DC 9.5V 0.2W HIGH OUTPUT BLUE LED (25,000 HRS. RATED LIFE)	6	6" ON CENTER
			G	DC 9.5V 0.2W HIGH OUTPUT GREEN LED (25,000 HRS. RATED LIFE)		
			R	DC 9.5V 0.2W HIGH OUTPUT RED LED (100,000 HRS. RATED LIFE)		
			W	DC 9.5V 0.2W HIGH OUTPUT WHITE LED (25,000 HRS. RATED LIFE)		
			LF 1	12 V 0.34 W INCANDESCENT LAMP (80,000 HRS. RATED LIFE)		

EXAMPLE

LF 5000	NL		
---------	----	--	--

FILL OUT BELOW FOR SUBMITTAL

LF 5000			
---------	--	--	--

PROJECT NAME	CONTRACTOR
FIXTURE SCHED. TYPE	DISTRIBUTOR
SPECIFIER	REPRESENTATIVE



visit us at :
www.celestiallighting.com
e-mail :
info@celestiallighting.com

14009 Dinard Ave.
Santa Fe Springs,
CA 90670

PH (562)•802•8811
(800)•233•3563
FX (562)•802•2882