




LITEFORM LF 1100

- Use as indirect lighting
- Ideal for areas with limited space
- Lamps included
- Transformer sold separately

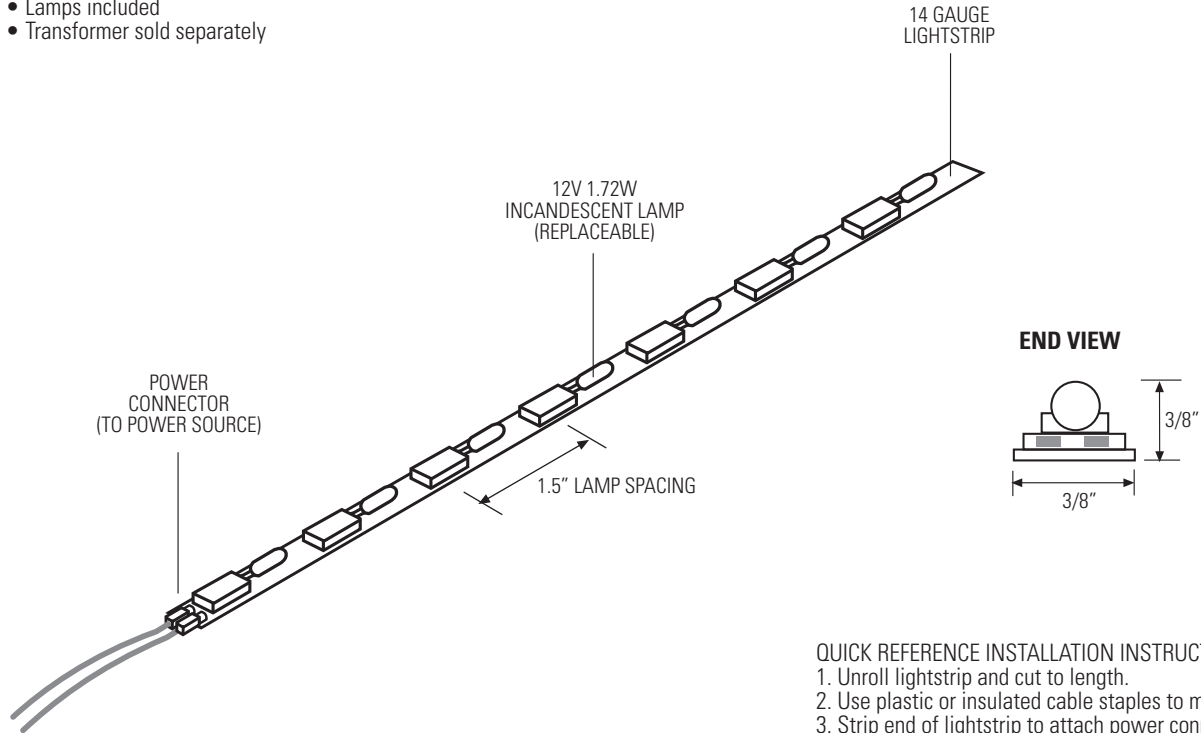

- QUICK REFERENCE INSTALLATION INSTRUCTIONS**
1. Unroll lightstrip and cut to length.
 2. Use plastic or insulated cable staples to mount to surface.
 3. Strip end of lightstrip to attach power connector.
 4. Connect to power source.

- 14 watts per foot
- 84 lumens per foot
- Maximum run per circuit (15 amps) ; 12 feet

•DRAWING NOT TO SCALE•

S P E C I F I C A T I O N S

PRODUCT CODE	LAMP		LAMP SPACING
LF1100	LF3	12V 1.72W INCANDESCENT LAMP (10.5 LUMENS; 20,000 HRS RATED LIFE)	1.5 1.5" ON CENTER OR SPECIFY OTHER SPACING

EXAMPLE

LF1100	LF3	1.5
--------	-----	-----

FILL OUT BELOW FOR SUBMITTAL

LF1100	LF3	
--------	-----	--

PROJECT NAME	SPECIFIER
FIXTURE SCHED. TYPE	CONTRACTOR
QUANTITY	DISTRIBUTOR
LENGTHS	REPRESENTATIVE

	visit us at : www.celestiallighting.com e•mail : info@celestiallighting.com	14009 Dinard Ave. Santa Fe Springs, CA 90670	PH (562)•802•8811 (800)•233•3563 FX (562)•802•2882
--	---	--	--