





LITEFORM 2200


- Use as indirect, task or linear lighting for wet locations
- Ideal for areas with limited space
- Use LF2 or LF3 lamp at 2" or 3" spacing for indirect or task lighting
- Use any LF lamp at 6" or 12" spacing for linear applications
- For color, use LEDs
- Lamps / LEDs included
- Transformer sold separately

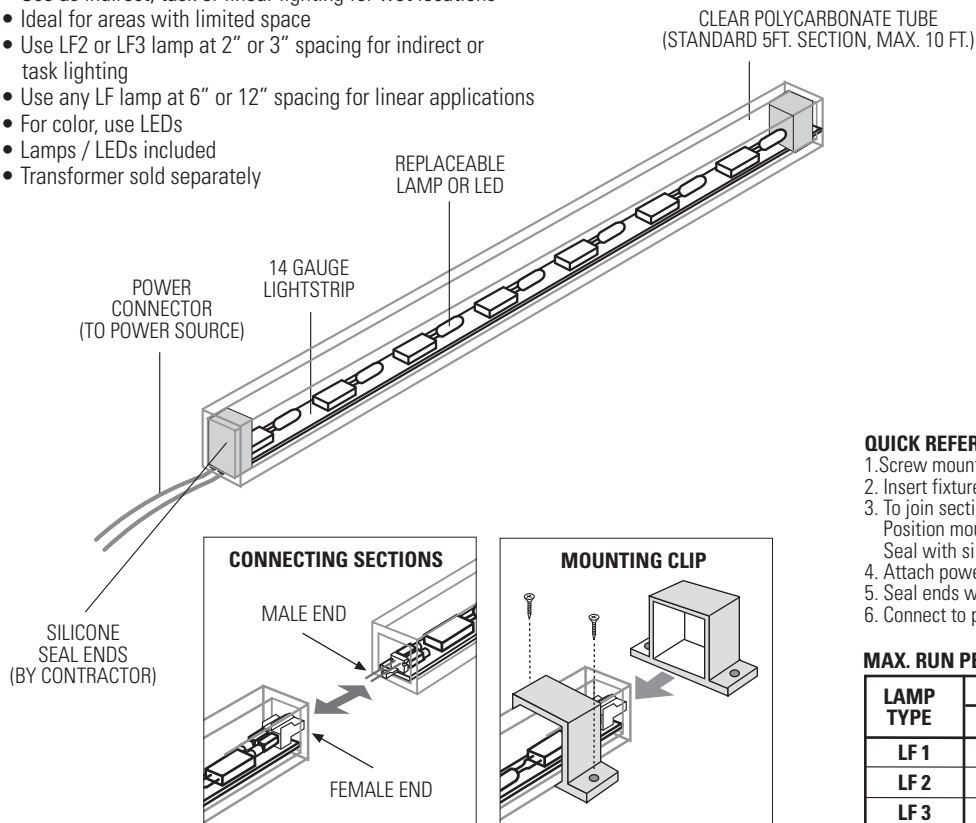

END VIEW



END VIEW (with mounting clip)

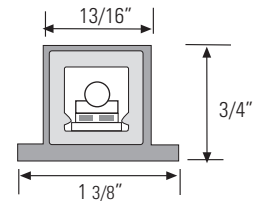

QUICK REFERENCE INSTALLATION INSTRUCTIONS

1. Screw mounting clip onto surface.
2. Insert fixture sections through mounting clip.
3. To join sections, mate male and female ends. Position mounting clip over joint to cover seam. Seal with silicone.
4. Attach power connector at beginning of run.
5. Seal ends with silicone
6. Connect to power source.

MAX. RUN PER CIRCUIT (7 AMPS or less)

| LAMP TYPE | LAMP SPACING | | | |
|-------------|--------------|--------|---------|---------|
| | 2" | 3" | 6" | 12" |
| LF 1 | 35 FT. | 52 FT. | 105 FT. | 200 FT. |
| LF 2 | 13 FT. | 19 FT. | 39 FT. | 78 FT. |
| LF 3 | 6 FT. | 10 FT. | 20 FT. | 40 FT. |
| LED | 47 FT. | 71 FT. | 142 FT. | 200 FT. |

•DRAWING NOT TO SCALE•

S P E C I F I C A T I O N S

| PRODUCT CODE | LED | LED SPACING |
|--------------|---|--|
| LF2200 | A DC9.5V 0.2W HIGH OUTPUT AMBER LED (1400 MLM; 100,000 HRS RATED LIFE) B DC9.5V 0.2W HIGH OUTPUT BLUE LED (350 MLM; 25,000 HRS RATED LIFE) G DC9.5V 0.2W HIGH OUTPUT GREEN LED (1100 MLM; 25,000 HRS RATED LIFE) R DC9.5V 0.2W HIGH OUTPUT RED LED (1200 MLM; 100,000 HRS RATED LIFE) W DC9.5V 0.2W HIGH OUTPUT WHITE LED (300 MLM; 25,000 HRS RATED LIFE) LF1 12V 0.34W INCANDESCENT LAMP (1 LUMEN; 80,000 HRS RATED LIFE) LF2 12V 0.92W INCANDESCENT LAMP (5 LUMENS; 80,000 HRS RATED LIFE) LF3 12V 1.72W INCANDESCENT LAMP (10.5 LUMENS; 20,000 HRS RATED LIFE) | 2 2" ON CENTER 3 3" ON CENTER 6 6" ON CENTER 12 12" ON CENTER OR SPECIFY OTHER SPACING |

EXAMPLE

| | | |
|--------|---|---|
| LF2200 | W | 3 |
|--------|---|---|

FILL OUT BELOW FOR SUBMITTAL

| | | |
|--------|--|--|
| LF2200 | | |
|--------|--|--|

| | |
|----------------------------|-----------------------|
| PROJECT NAME | SPECIFIER |
| FIXTURE SCHED. TYPE | CONTRACTOR |
| QUANTITY | DISTRIBUTOR |
| LENGTHS | REPRESENTATIVE |



visit us at :
www.celestiallighting.com
e•mail :
info@celestiallighting.com

14009 Dinard Ave.
Santa Fe Springs,
CA 90670

PH (562)•802•8811
(800)•233•3563
FX (562)•802•2882