




BOL 6000 QHX



- Ideal for wall wash or task lighting in curved spaces
- Uses high-performance ALR lamps for precise effect
- Also uses MR lamps (Refer to CL 119-A)
- Twist & lock DC bayonet base for safe lamping in lamp-down applications
- Listed for damp location
- Dimmable

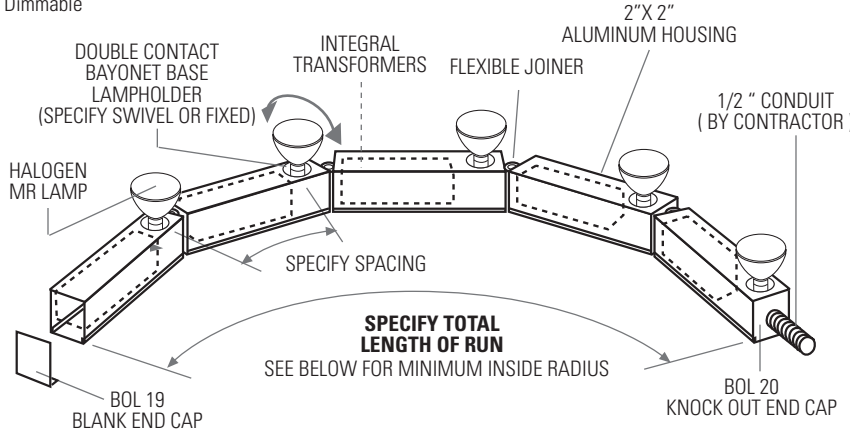

RECOMMENDED LAMPS
 TYPE : ALR LAMP
 BASE : DC BAYONET BASE (B15d)
 BRAND : PHILIPS


CODE	WATTS	BEAM ANGLE	AVG. CENTER CANDLE POWER	RATED HRS.	COLOR TEMP.
ALR-37	20 W	6°	7000 cd	4000	3000 K
		18°	1000 cd	4000	3000 K
		32°	400 cd	4000	3000 K
ALR-56	50 W	10°	13000 cd	4000	3000 K
		25°	1900 cd	4000	3000 K

LAMPS NOT INCLUDED

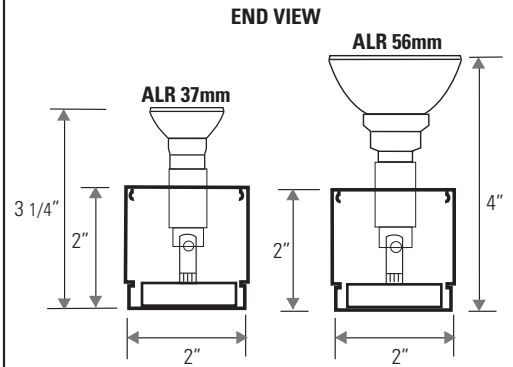

QUICK REFERENCE INSTALLATION INSTRUCTIONS

1. Remove cover piece from module, by removing screws and using flathead screwdriver to pry open.
2. Screw mount bottom piece directly onto secure surface.
3. Snap cover piece into bottom piece and replace screws.
4. To continue run, attach and mount next module and make electrical connections.
5. Attach end caps at beginning and end of run, sliding base plate into bottom piece and securing with screw.
6. Connect lead wires at beginning of run to power source and ground. Do not power until installation complete.
7. Insert lamps.

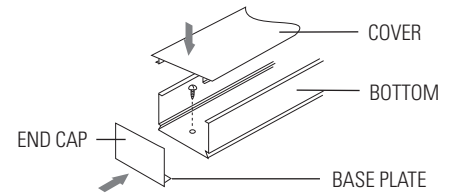

SPECIFICATIONS

PRODUCT CODE	LAMPHOLDER		VOLTS	LAMP TYPE	LAMP SPACING & RADIUS		TRANSFORMER		FINISH	
	S	F			6" o.c.	12" o.c.	I	R	NAL	SAT
BOL 6000 QHX	S	Swivel	12V	ALR-37 ALR-56	6" o.c. 6" on center (13" minimum inside radius)	12" o.c. 12" on center (28" minimum inside radius)	I	Integral	NAL	Natural aluminum
	F	Fixed		Or specify MR lamp (Refer to CL 119-A)	Specify other		Remote (Consult factory)	SAT		Anodized satin
										Or specify other

EXAMPLE

BOL 6000 QHX	S	12V	ALR-37	6" o.c.	I	NAL
--------------	---	-----	--------	---------	---	-----

FILL OUT BELOW FOR SUBMITTAL

BOL 6000 QHX		12V				
--------------	--	-----	--	--	--	--

PROJECT NAME	SPECIFIER
FIXTURE SCHED. TYPE	CONTRACTOR
QUANTITY	DISTRIBUTOR
LENGTHS	REPRESENTATIVE




visit us at :
 www.celestiallighting.com
 e-mail :
 info @ celestiallighting.com

14009 Dinard Ave.
 Santa Fe Springs,
 CA 90670


PH (562)•802•8811
 (800)•233•3563
 FX (562)•802•2882

MR 11

STANDARD LAMP

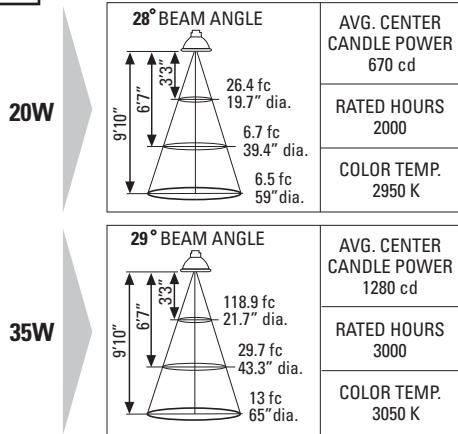


OPTIONAL LAMPS

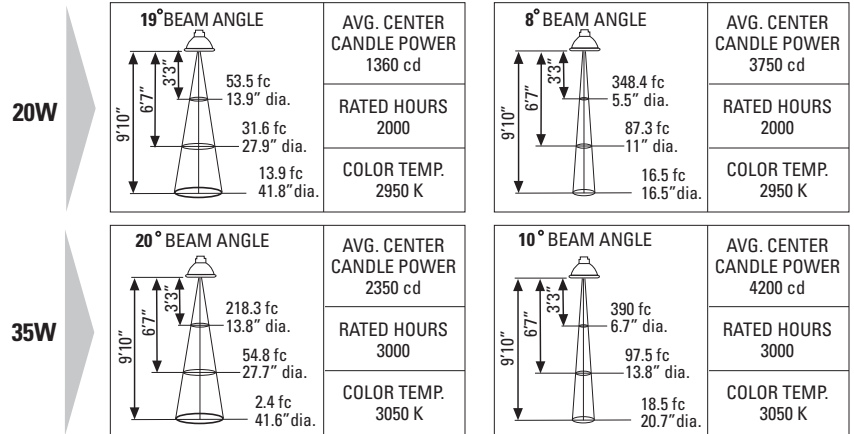


MR 16

STANDARD LAMP

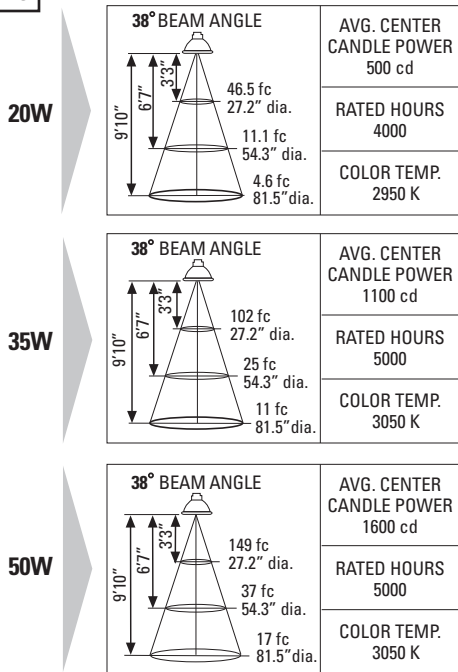

OPTIONAL LAMPS

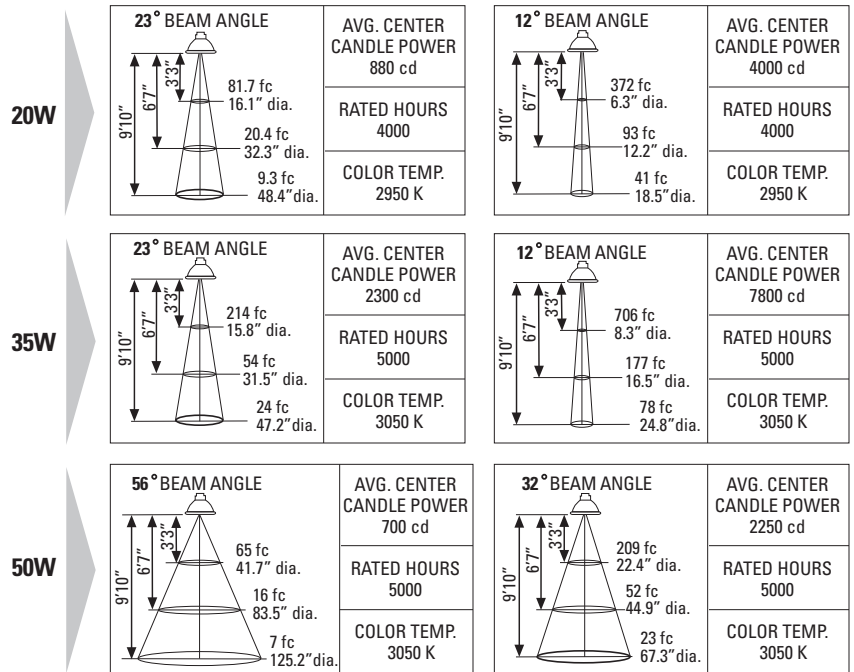

FILL OUT BELOW

TYPE	WATTS	BEAM ANGLE
(e.g.) MR 11	20 W	28°

PROJECT NAME	CONTRACTOR
FIXTURE SCHED. TYPE	DISTRIBUTOR
SPECIFIER	REPRESENTATIVE



visit us at :
www.celestiallighting.com
e-mail :
info@celestiallighting.com

14009 Dinard Ave.
Santa Fe Springs,
CA 90670

PH (562)•802•8811
(800)•233•3563
FX (562)•802•2882